

EAST(SHENZHEN)TECHNOLOGY CO.,LTD


Datasheet

Model: 2CR1-3N Lithium Battery


NO.: 04-2020

Eunicell Battery


2CR1/3N LITHIUM BATTERY

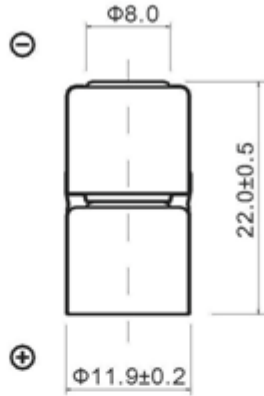


Discharge curve at various temperatures

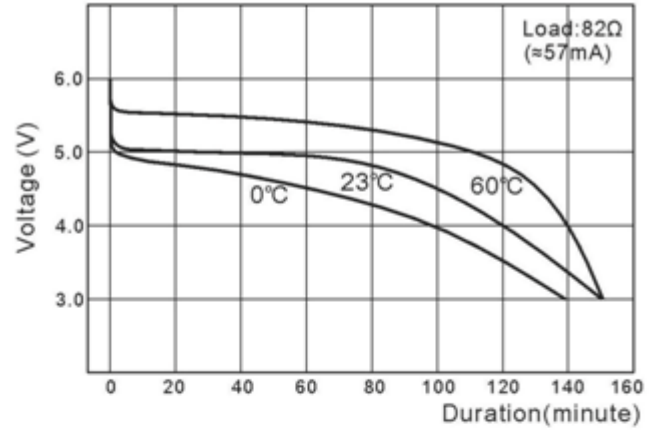

Discharge curve at various temperatures

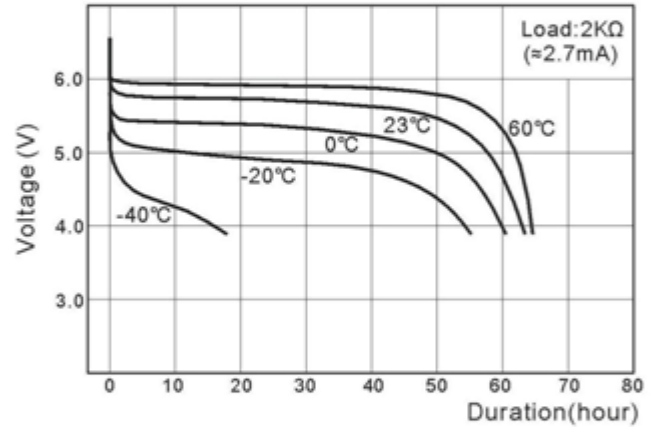

Discharge curve at various currents

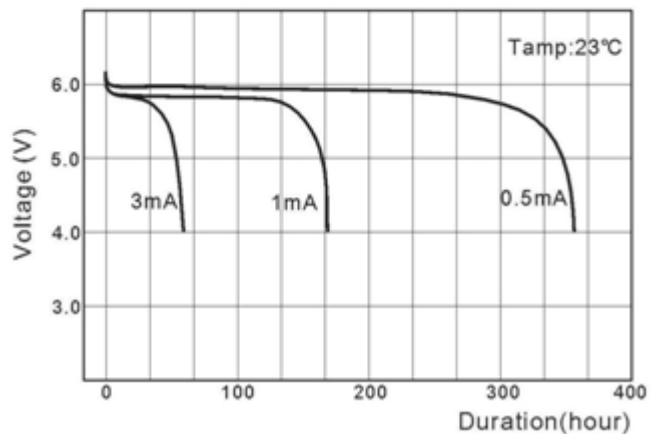

Model	2CR1/3N	
Nominal Voltage	6V	
Nominal Capacity	170mAh	
Dimension	φ 11.9*22.0mm	
Weight	7 g	
Li contact	0.08 g	
Temperature range	-40~60 ℃	
Standard Discharge Current	3mA	
Max. Discharge Current	Continuous	60mA
	Pulse	100mA

Address: 11F, Taibang Technology Building, No.4 Road High-Tech South, Nanshan District, Shenzhen City, China

Tel +86 (755) 86006961 Fax +86 (755) 86968868

Email salesmanager@eunicell.com Website http://www.eunicell.com