

CR26500

3V Lithium Battery Data Sheet


Specifications :

Nominal Voltage	3.0 V	Dimensions (mm)
Nominal Capacity	6000 mAh	
Standard Load	10 mA/2.0V/25°C	
Standard Current	0.2 mA	
Max. Continuous Current	2000 mA	
Max Pulse Current	3000 mA	
Operating Temperature	-40~+85°C	
Weight	62.0 (g)	
Chemistry	Lithium / Manganese Dioxide	
Self Discharge at 23°C	< 2% / year	
Certification	MSDS	


Note: Capacity 6000mAh is obtained at standard Eunicell load 10mA to 2.0V at 25°C.

Performance :


Discharge Characteristics

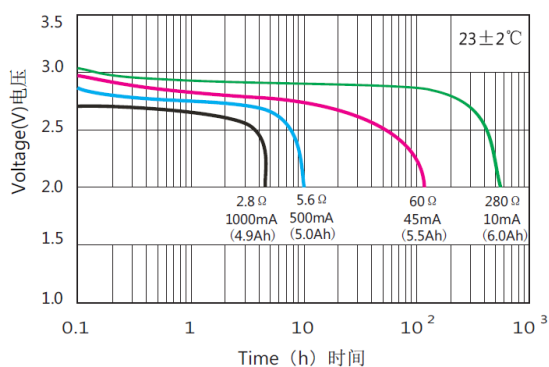


Temperature Characteristics

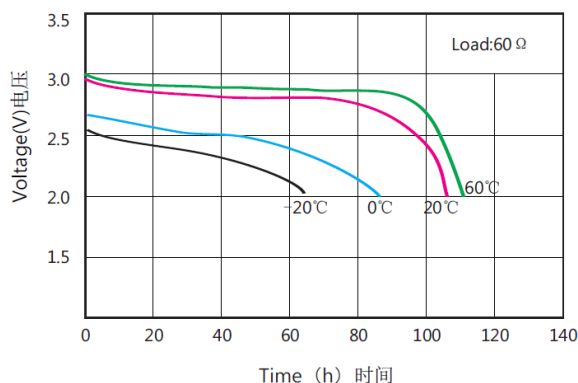

Capacity vs Current mAh VS Current

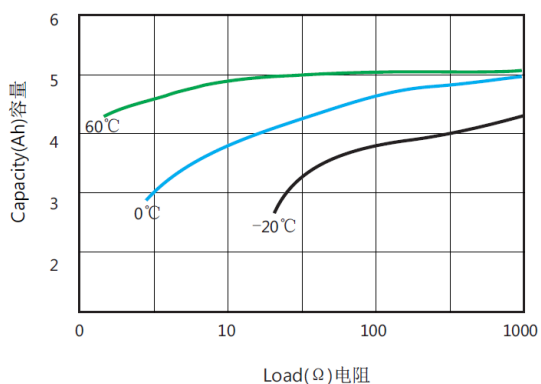

Storage characteristics

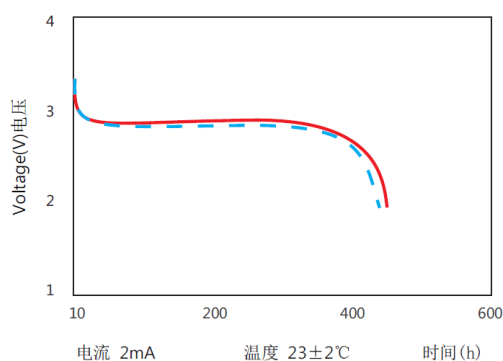

All data contained herein is for single cell and may vary for cell with specific configuration, subject to change without prior notice.

EAST(SHENZHENTECHNOLOGY CO.,LTD

Eunicell Battery

Address: 11F, Taibang Technology Building, No.4 Road High-Tech South, Nanshan District, Shenzhen City, China

Tel +86 (755) 86006961

Fax +86 (755) 86968868

Email salesmanager@eunicell.com

Website http://www.eunicell.com